

Secure AODV in MANET

Software: NetSim Standard v13.1(64-bit), Microsoft Visual Studio 2019

Project Download Link:

https://github.com/NetSim-TETCOS/Secure_AODV_v13.1/archive/refs/heads/main.zip

Follow the instructions specified in the following link to download and setup the Project in NetSim:

<https://support.tetcos.com/en/support/solutions/articles/14000128666-downloading-and-setting-up-netsim-file-exchange-projects>

Introduction

SAODV is an extension of the AODV routing protocol that can be used to protect the route discovery mechanism providing security features like integrity and authentication. The reason only route discovery is secured by AODV is because data messages can be protected using a point-to-point security protocol like IPSec. SAODV uses a key management system, and each node maintains public keys, encryption keys and decryption keys.

To implement SAODV, we have added **Secure AODV.c**, **RSA.c** and **Malicious.c** files in AODV project. RSA.c file is used to generate keys, encrypt, and decrypt the data. Users can implement their own encryption algorithms by changing RSA.c file. Malicious.c file is used to identify malicious nodes present in the network.

Steps to run the project

1. Open the Source codes in Visual Studio by going to Your work-> Source Explorer Options and Clicking on Open code button in NetSim Home Screen window.
2. Under the AODV project in the solution explorer you will be able to see that Malicious.c and Secure_AODV.c files which contain source codes which implements SAODV in NetSim respectively.
3. Right click on the solution in the solution explorer and select Rebuild.

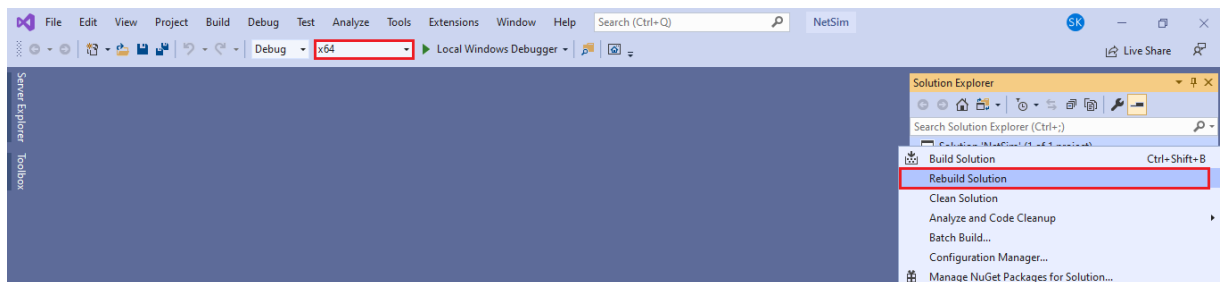


Figure 1: Screen shot of NetSim project source code in Visual Studio

4. Upon successful build modified libAODV.dll file gets automatically updated in the directory containing NetSim binaries.

Example

1. The **Secure_AODV_Workspace** comes with a sample network configuration that are already saved. To open this example, go to Your work in the Home screen of NetSim and click on the **Secure_AODV_Example** from the list of experiments.

2. After running the simulation, a **Secure_AODV.log** file gets created in the bin folder which is part of NetSim's installed directory. This is explained in the next section

Secure AODV implementation

Here users can enable Secure AODV (Open **AODV.h** file)

```
#ifndef _NETSIM_AODV_H_
#define _NETSIM_AODV_H_
#ifdef __cplusplus
extern "C" {
#endif
```

```
#define SAODV_ENABLE
#define MALICIOUS_ENABLE
```

A **Secure_AODV.c** file is added to the AODV project which contains the following important functions:

- `saodv_encrypt_packet()`; //This function is used to encrypt the control packet data
- `saodv_decrypt_packet()`; //This function is used to decrypt the control packet data
- `get_rrep_str_data()`; //This function is used to get the route reply data from AODV_RREP control packet
- `get_rreq_str_data()`; //This function is used to get the route request data from AODV_RREQ control packet
- `get_saodv_ctrl_packet_type()`; //This function is used to change the control packet type from AODV (AODV_RREQ, AODV_RREP) to SAODV (SAODV_RREQ, SAODV_RREP)
- `get_saodv_ctrl_packet()`; //This function is called whenever a new control packet is generated
- `get_aodv_ctrl_packet()`; //This function is called while processing the control packets

Comment the line `#define MALICIOUS_ENABLE` present in AODV.h file. Rebuild the solution and run the simulation.

Results and discussion

After simulation of the given Configuration file, open packet animation. In the packet animation, users can notice **SAODV_RREQ** and **SAODV_RREP** control packets.

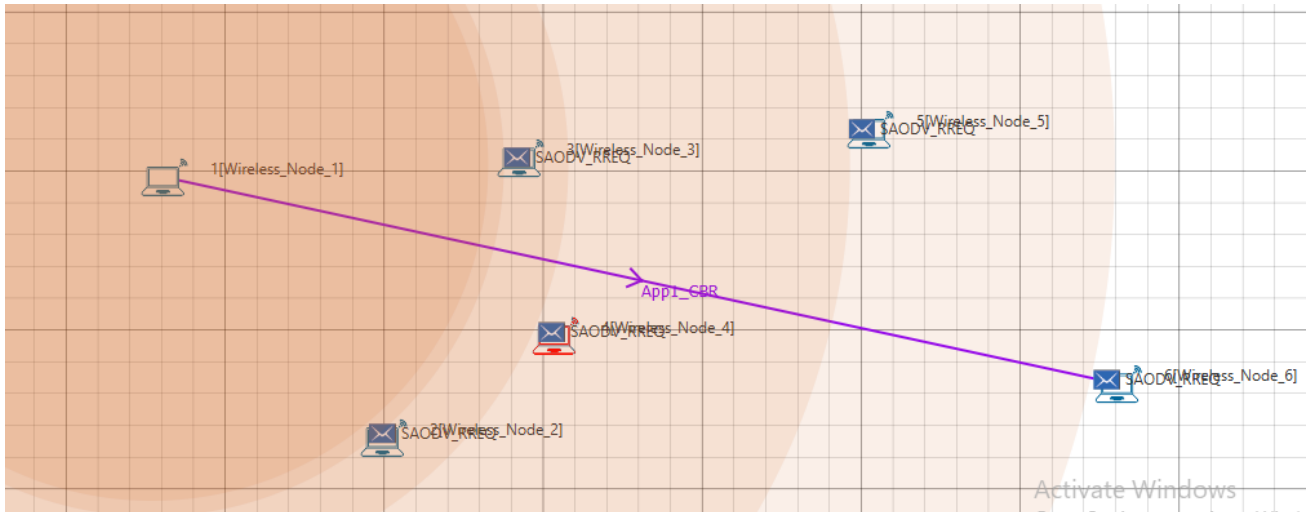


Figure 2: NetSim Animation Window

The SAODV codes also logs certain details in SAODV.log (i.e. present in the NetSim setup install directory bin folder). The format of the log file is such that each control packet is logged. The first line represents the packet type and the numbering used in a NetSim internal numbering system where by **30701 is RREQ and 30702 is RREP**. The second line is the message which is encrypted. The third line contains the encrypted message after running the RSA encryption algorithm. The fourth line is after decryption and if everything is OK, the 2nd and 4th lines must match.

.....
Packet Type = 30701

Org Data = 1,0,1,11.1.1.6,0,11.1.1.1

Encrypted Data = *-ÿ--**i**i-ÿ-**-**i**i*-* Decrypted Data = 1,0,1,11.1.1.6,0,11.1.1.1**

.....

Malicious node implementation

Here users can enable code to malicious node problem. Enable `#define MALICIOUS_ENABLE` and comment `#define SAODV_ENABLE` that are present inside AODV.h file.

```

25
26
27 // #define SAODV_ENABLE
28 #define MALICIOUS_ENABLE
29
30
31 #define AODV_ACTIVE_ROUTE_TIMEOUT 3000* MILLISECOND
32 #define AODV_ALLOWED_HELLO_LOSS 2
33 #define AODV_BLACKLIST_TIMEOUT AODV_RREQ_RETRIES * AODV_NET_TF
34 #define AODV_DELETE_PERIOD K * max (AODV_ACTIVE_ROUTE_TIME
35 #define K 5
36 #define AODV_HELLO_INTERVAL 1000* MILLISECOND
37 #define AODV_LOCAL_ADD_TTL 2
38 #define AODV_MAX_REPAIR_TTL 0.3 * AODV_NET_DIAMETER
39 #define AODV_MIN_REPAIR_TTL //see note below
40 #define AODV_MY_ROUTE_TIMEOUT 2 * AODV_ACTIVE_ROUTE_TIMEOUT
41 #define AODV_NET_DIAMETER 35
42 #define AODV_NET_TRAVERSAL_TIME 2 * AODV_NODE_TRAVERSAL_TIME *
43 #define AODV_NEXT_HOP_WAIT AODV_NODE_TRAVERSAL_TIME + 10

```

Figure 3: Commit and Uncommit for SAODV and Malicious code

Malicious node advertises wrong routing information to produce itself as a specific node and receives whole network traffic.

After receiving whole network traffic, it can either modify the packet information or drop them to make the network complicated.

In packet animation, users can notice that malicious node will take all the packets and drops without forwarding to destination.

A file **malicious.c** is added to the AODV project which contains the following functions:

- IsMaliciousNode(); //This function is used to identify whether a current device is malicious or not in-order to establish malicious behavior.
- fn_NetSim_AODV_MaliciousRouteAddToTable(); //This function is used to add a fake route entry into the route table of the malicious device with its next hop as the destination.
- fn_NetSim_AODV_MaliciousProcessSourceRouteOption(); //This function is used to drop the received packets if the device is malicious, instead of forwarding the packet to the next hop

Rebuild the solution and run the simulation.

Results and discussion

You can set any device as a malicious node, and you can have more than one malicious node in a scenario. Device id's of malicious nodes can be set using malicious_node [] array present in malicious.c file. Comment the line #define SAODV_ENABLE present in AODV.h file. Rebuild the solution and replace the dlls as explained before and run the simulation. If we run simulation without SAODV, we will get zero throughput because malicious node gets all the packets and drops without forwarding to destination. You can notice this in NetSim packet animation.

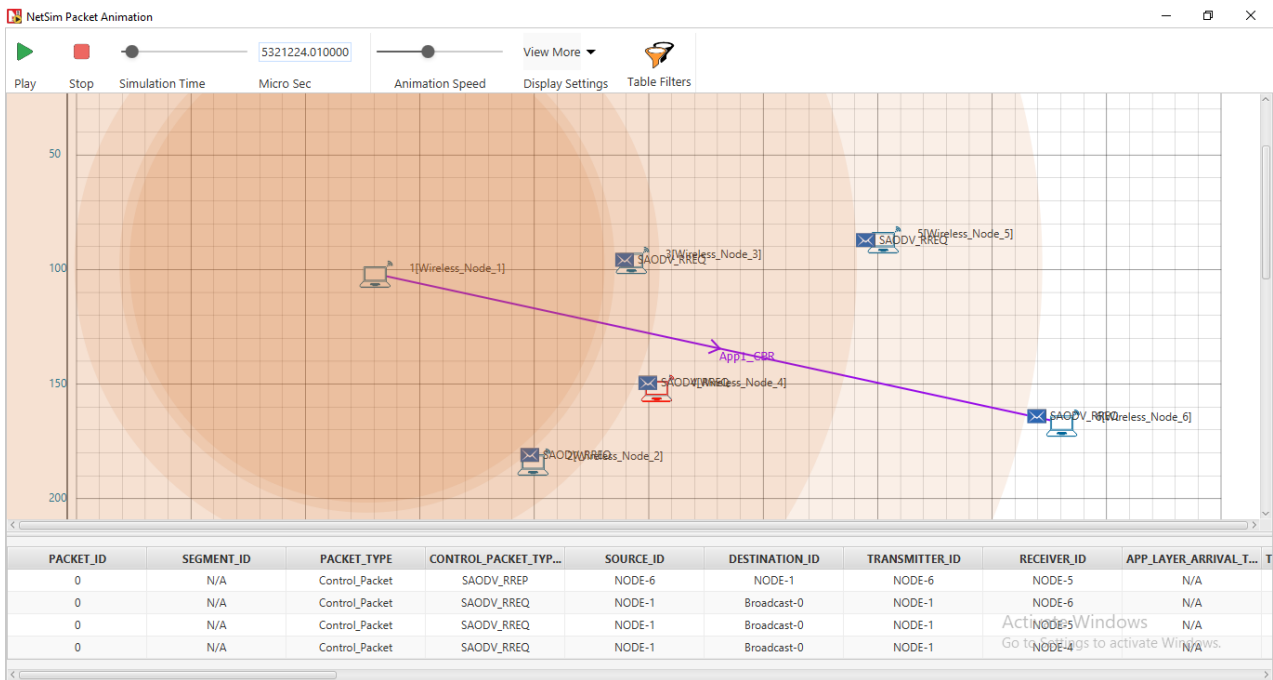


Figure 4: NetSim Animation Window

Both Secure AODV and Malicious node implementation

Enable the below mentioned lines of code present in AODV.h file. #define SAODV_ENABLE
#define MALICIOUS_ENABLE

Rebuild the solution and run the simulation.

Results and discussion

Packets will be transmitted to the destination, since SAODV helps in overcoming the Malicious Node problem. Route reply RREP from malicious node 4 will not be accepted by Node 1. It takes the Route reply from node 2 and forms the route.

The SAODV logs certain details in **Secure_AODV.log**. The first line represents the packet type 30701 = RREQ. The second line is the message logged by SAODV when malicious node tries to decrypt the message.

.....
Packet Type = 30702
Encryption and decryption fails. This could be a malicious node

.....
Packet Type = 30702
Encryption and decryption fails. This could be a malicious node
.....

Appendix: NetSim source code modifications

We have added `Secure_AODV.c`, `RSA.c` and `Malicious.c` files, we have added the following macros code in `AODV.h` file within AODV project.

```
#define SAODV_ENABLE
#define MALICIOUS_ENABLE
Then we have added the following lines of code in enum_AODV_Ctrl_Packet in AODV.h file
#ifdef SAODV_ENABLE
SAODV_RREQ,
SAODV_RREP,
SAODV_RERR,
#endif
```

We have added the following function prototypes in `AODV.h` file, within AODV project.

```
#ifdef SAODV_ENABLE
void get_saodv_ctrl_packet(NetSim_PACKET* packet);
void get_aodv_ctrl_packet(NetSim_PACKET* packet);
void sadov_copy_packet(NetSim_PACKET* dest, NetSim_PACKET* src);

#endif
void saodv_free_packet(NetSim_PACKET* packet);
void remove_from_mapper(void* ptr, bool isfree);

bool IsMaliciousNode(NETSIM_ID devId);
```

We have added the following function prototypes in `AODV.c` file

```
bool IsMaliciousNode(NETSIM_ID devId);
```

```
int fn_NetSim_AODV_MaliciousRouteAddToTable(NetSim_EVENTDETAILS*);
int fn_NetSim_AODV_MaliciousProcessSourceRouteOption(NetSim_EVENTDETAILS* );
```

Changes to `NETWORK_IN` event in `fn_NetSim_AODV_Run()` function in `AODV.c` file, within AODV project

```
#ifdef SAODV_ENABLE
switch(pstruEventDetails->pPacket->nControlDataType)
{
case SAODV_RREQ:
case SAODV_RREP:
case SAODV_RERR:
get_aodv_ctrl_packet(pstruEventDetails->pPacket); break;
}
if(pstruEventDetails->pPacket == NULL)
{
return -1; //Decryption fail.
}
#endif
```

We have added the following lines of code in AODVctrlPacket_RREQ and default cases in NETWORK_IN event to check the current node is malicious or not.

```
if(IsMaliciousNode(pstruEventDetails->nDeviceId))
fn_NetSim_AODV_MaliciousProcessSourceRouteOption(pstruEventDetails);
```

Changes code in fn_NetSim_AODV_CopyPacket () function, in AODV.c file, within AODV project

```
#ifndef SAODV_ENABLE
switch(srcPacket->nControlDataType)
{
case SAODV_RERR:
case SAODV_RREQ:
case SAODV_RREP:
saodv_copy_packet(destPacket,srcPacket);
return 0;
break;
default:
#endif
        return fn_NetSim_AODV_CopyPacket_F(destPacket,srcPacket);
#ifdef SAODV_ENABLE
        break;
}
#endif
```

Changes code in int fn_NetSim_AODV_FreePacket () present in the AODV.c file, within AODV project

```
#ifndef SAODV_ENABLE
switch(packet->nControlDataType)
{
case SAODV_RERR:
case SAODV_RREQ:
case SAODV_RREP:
saodv_free_packet(packet);
return 0;
break;
default:
remove_from_mapper(packet->pstruNetworkData->Packet_RoutingProtocol, true);
return 0;
break;
}
#endif
```

Changes code in fn_NetSim_AODV_GenerateRREQ (), fn_NetSim_AODV_RetryRREQ () and fn_NetSim_AODV_ForwardRREQ () functions present in RREQ.c file, within AODV project

```
#ifndef SAODV_ENABLE
        get_saodv_ctrl_packet(packet);
#endif
```

Changes code in fn_NetSim_AODV_GenerateRREP(), fn_NetSim_AODV_ForwardRREP () and fn_NetSim_AODV_GenerateRREPByIntermediate () functions present in RREP.c file, within AODV project

```
#ifdef SAODV_ENABLE
    get_saodv_ctrl_packet(packet);
#endif
```